


**SS SAMPLING VALVE
WITH HEATING JACKET
VERTICAL LINE
MULTIPLE FUNCTION**

**VLB-EC - КЛАПАН ИЗ
НЕРЖАВЕЮЩЕЙ СТАЛИ ДЛЯ
ОТБОРА ПРОБ
С ОБОГРЕВОМ
ФЛАНЦЕВЫЙ
ВЕРТИКАЛЬНЫЙ ТРУБОПРОВОД
МНОГОФУНКЦИОНАЛЬНЫЙ**

**PRELEVEUR AC. INOX
AVEC ENVELOPPE CHAUFFANTE
MONTAGE VERTICAL
MULTIFONCTION**

**Material | Материал | Matière²
1.4435 / 1.4404 (316L) / PTFE**

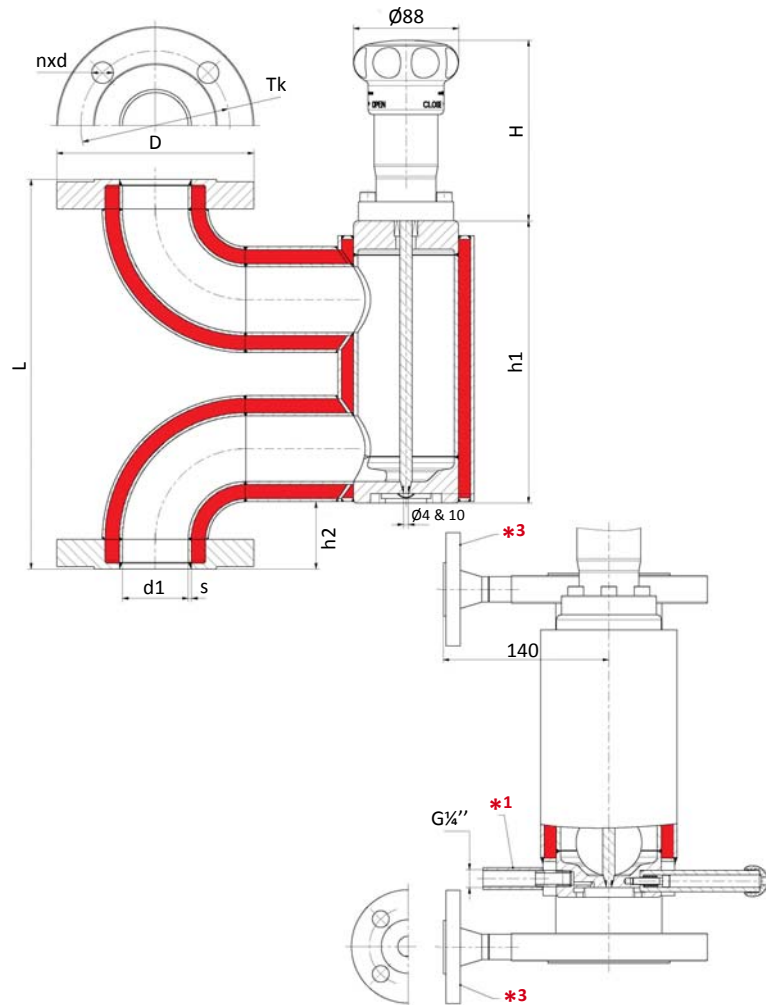

Dimensions/Abmessungen in mm

| DIN - EN | | | | | | | | | | | | | |
|----------|----------------|------------|-----------|-----------|-----------|--|--|------|-------|--------|--------|--------|-------|
| DN | L | H | l1 | | h1 | h2 | s | d1 | D | | Tk | | kg |
| | | | PN16/40 | | | | | | PN16 | PN40 | PN16 | PN40 | |
| 15 | 250 | 152 | 170 | 187 | 36 | 1.6 | 18.1 | 95 | 65 | | 4x14 | | 9.3 |
| 25 | 263 | | | | 44 | | | 115 | 85 | | | | |
| 32 | 278 | | | | 50 | 140 | 100 | | | | | | |
| 40 | 296 | | 210 | 187 | 59 | 2.6 | 55.1 | 150 | 110 | | 4x18 | | 11.1 |
| 50 | 329 | | | | 59 | | | 165 | 125 | | | | |
| 80 | 442 | | 240 | 249 | 105 | 2.6 | 83.7 | 200 | 160 | | 8x18 | | 12.7 |
| 100 | 541 | 290 | 306 | 290 | 109.1 | | | 220 | 235 | 180 | 190 | 8x18 | |
| PS | TS (°C) | -40 | 0 | 100 | 150 | 200 | *3 HEATING JACKET ОБОГРЕВ ENVELOPPE CHAUFFANTE | | | | | | |
| | PN16 | 16 | 16 | 15.1 | 13.7 | 12.7 | DN 15 / PN 40 PS : 31.8bar @200°C (425psi@392°F) | | | | | | |
| | PN40 | 16 | 16 | 16 | 16 | 16 | TS : -40 / +200°C (-40 / +392°F) | | | | | | |
| ANSI | | | | | | | | | | | | | |
| ANSI | L | H | l1 | | h1 | h2 | s | d1 | D | | Tk | | kg |
| | | | 150#/300# | | | | | | 150# | 300# | 150# | 300# | |
| 1/2 | 268 | 152 | 170 | 179 | 44 | 1.6 | 18.1 | 89 | 95 | 60.5 | 66.6 | 4x15.7 | |
| 1 | 296 | | | | 52 | | | 108 | 124 | 79.2 | 88.9 | | |
| 1 1/2 | 332 | | | | 67 | 127 | 156 | 98.6 | 114.3 | 4x15.7 | | | |
| 2 | 365 | | 210 | 179 | 67 | 2.6 | 55.1 | 152 | 165 | | | 120.7 | 127 |
| 3 | 478 | | | | 240 | | | 241 | 113 | 83.7 | 190 | 210 | 152.4 |
| 4 | 599 | | 290 | 298 | 298 | 109.1 | 229 | 254 | 190.5 | 200.2 | 8x19.1 | | |
| PS | TS (°F/°C) | <100 / <40 | 200 / 100 | 300 / 150 | 400 / 200 | *3 HEATING JACKET ОБОГРЕВ ENVELOPPE CHAUFFANTE | | | | | | | |
| | 150# (psi/bar) | 232 / 16 | 195 / 14 | 175 / 12 | 160 / 11 | 1/2" / 150lbs PS: 160psi @ 400°F TS: -20 / 400°F (11bars @200°C) | | | | | | | |
| | 300# (psi/bar) | 232 / 16 | 232 / 16 | 232 / 16 | 232 / 16 | 1/2" / 300lbs PS: 415psi @ 400°F TS: -20 / 400°F (28bars @200°C) | | | | | | | |

1 vent hole connection | отверстие для вентиляции | connexion d'évent p.5.010

2 other material on request | другие материалы по запросу | autres matières sur demande p.3.010